



PROCEEDINGS OF THE COCHIN DEVASWOM BOARD

Abstract

Cochin Devaswom Board – Maramath wing- Renovation of East side 'Gopuram' of Sree Nelluvai Dhanwanthari temple – Nelluvai Devaswom – Thiruvilwamala Group- Quotations invited – Order issued

- Read
1. OM No. A5 8745/22 dt. 01-06-2024
 2. Request from KU Samithy dt. 01-03-2024
 3. Letter from DAC Thiruvilwamala on 1739/24 dt. 23-04-2024
 4. Note from AE dt. 12-07-2024
 - 5 Note from AEE dt. 26-09-2024
 6. Note from EE dt. 26-09-2024
 7. Decision of DC dt. 01-10-2024

Order on H1. 1496/2024 dt. 07-10-2024

As per the papers cited above an estimate of Rs. 1,96,000/- (Rupees One lakh ninety six thousand only) is passed and sanction is accorded to execute the above work after inviting local quotations.

The sealed quotations should be received in this office on or before 21-10-2024 at 3 P.M. and will be opened at 3.30 P.M. on the same day in the presence of Executive Engineer, Cochin Devaswom Board/higher officials of Cochin Devaswom Board, Thrissur.

The sealed quotations should be addressed to the Executive Engineer, Cochin Devaswom Board, Thrissur and should contain the PAN number of the quotationer.

A copy of the estimate along with notification is herewith forwarded to Devaswom commissioner Devaswom Assistant Commissioner, Thiruvilwamala group for exhibiting in their office Notice boards.

(By Order)

Sd/-


S. Gopakumar

Assistant Engineer

To

Notice Board,
The Assistant Commissioner - Thiruvilwamala,
The Devaswom Commissioner, The Executive Engineer ,
The Assistant Executive Engineer,
The Assistant Engineer, Stock File

//Approved for issue//


Junior Superintendent

TS Register No: 1623/2024-2025

AS Register No:1672/2024-2025

**Renovation of East side Gopuram of Sree Nelluvai Dhanwanthari Temple-Nelluvai
Devaswom-Thiruvilwamala Group**


Abstract Estimate

(Dsr year: 2018, Cost Index Applied for this estimate is 35.59%)

1 Renovation		
1	15.31	Dismantling tiled roofing with battens, boarding etc. complete including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.
		Net Total Quantity
		61.440 sqm
		Say 61.440 sqm @ Rs 176.54 / sqm
		Rs 10846.62
2	15.14.1	Dismantling wood work in frames, trusses, purlins and rafters up to 10 metres span and 5 metres height including stacking the material within 50 metres lead:Of sectional area 40 square centimetres and above
		Net Total Quantity
		0.282 cum
		Say 0.282 cum @ Rs 3938.41 / cum
		Rs 1110.63
3	od84036/2024_2025	Supplying and fixing Anjily wood wrought and put up for roof members including cost and conveyance of materials etc. complete .
		Net Total Quantity
		0.282 cum
		Say 0.282 cum @ Rs 127438.09 / cum
		Rs 35937.54
4	50.9.14.1	Supplying and fixing Anjily wood reapers of size 50x25 mm with wire nails including cost and conveyance of materials etc. complete.
		Net Total Quantity
		0.179 cum
		Say 0.179 cum @ Rs 102593.99 / cum
		Rs 18364.32
5	50.9.14.4	Supplying and fixing Dept. wood reapers of size 50x25 mm with wire nails including cost and conveyance of materials etc . complete.
		Net Total Quantity
		0.060 cum
		Say 0.060 cum @ Rs 20832.05 / cum
		Rs 1249.92
6	od62325/2024_2025	Supplying and stacking M.P Roofing tile including cost and conveyance charge etc complete
		Net Total Quantity
		950.000 each
		Say 950.000 each @ Rs 31.36 / each
		Rs 29792.00
7	od62326/2024_2025	Supplying and stacking M.P ridge tile including cost and conveyance charge etc complete

		Net Total Quantity	30.000 each
		Say 30.000 each @ Rs 45.30 / each	Rs 1359.00
8	od62327/2024_2025 oiling roof member with diesel oil		
		Net Total Quantity	92.160 sqm
		Say 92.160 sqm @ Rs 94.16 / sqm	Rs 8677.79
9	od62328/2024_2025 Setting M.P hip and ridge tiles set in lime mortar 1:2 including finishing edges including all cost of materials labour charges and conveyance charges.etc.complete.		
		Net Total Quantity	20.300 metre
		Say 20.300 metre @ Rs 245.99 / metre	Rs 4993.60
10	od62329/2024_2025 Roofing with existing MP tiles including labour charges etc.complete. 		
		Net Total Quantity	61.440 sqm
		Say 61.440 sqm @ Rs 69.85 / sqm	Rs 4291.58
11	od63853/2024_2025 Providing lime mortar boardering to tiled roof including all cost of materials labourcharges conveyance etc. complete 		
		Net Total Quantity	9.000 metre
		Say 9.000 metre @ Rs 120.59 / metre	Rs 1085.31
12	od63870/2024_2025 setting thazhikakudam		
		Net Total Quantity	3.000 each
		Say 3.000 each @ Rs 987.28 / each	Rs 2961.84
2 Supplying new copper Thazhikakudam on actuals			
		Lump-Sum Total	Rs 45000.00
		Provision for GST payments (in %) @	18.0%
		Amount reserved for GST payments	29820.63
		Total	195490.63
		Lumpsum for round off	509.37
			TOTAL Rs 196000.00
			Rounded Total Rs 1,96,000
Rupees One Lakh Ninety Six Thousand Only			

(Cost Index Applied for this estimate is 35.59%)

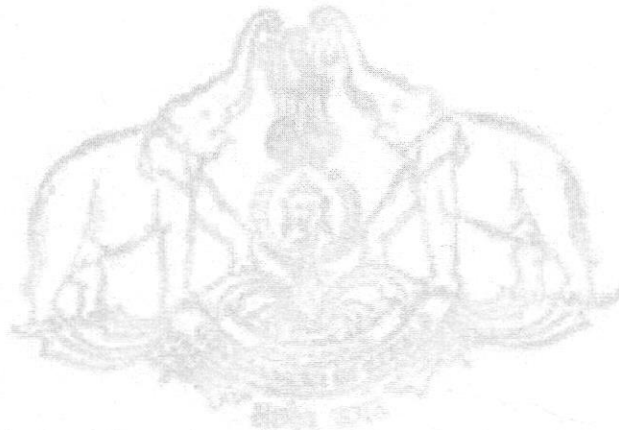

Other Engineering Organisations

PRICE